




LA212

产品说明书

# LA212 专业音响 PROFESSIONAL AUDIO




## 固定安装 Application and installation

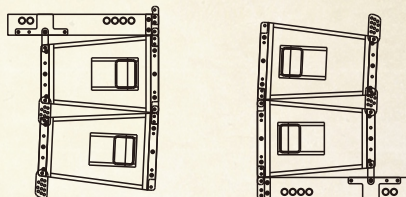


## 结构图纸 Construction Drawing:


外观设计可能有所改变  
Cosmetic change may be made




主视图



后视图



侧视图



顶视图

## 技术指标 Technical data & Introduction:

型号: LA212

单元类型: 2 x 12" LF / 2 x 1.75" HF / 4 x 6.5" MF

频率范围 (±3dB): 60-20000Hz

额定功率 (节目/峰值): 800/1200W (passive)

500/1000W (biamped LF)

300/1000W (biamped MF)

120/300W (biamped HF)

阻抗: passive 8 Ohm

biamped LF 8 Ohm

biamped MF 8 Ohm

biamped HF 16 Ohm

覆盖角度 (水平×垂直): 80° or 120° × 10°

灵敏度 1W/1M : 116dB passive 8 Ohm

103dB (biamped LF)

108dB (biamped MF)

111dB (biamped HF)

最大声压级 (1M): 133dB

外形尺寸 (高×宽×深): 356x1120x688 mm

重量: 36.9kg/38kg (带分频版)

涂层: 聚脲喷漆

可选项: PWLA10内置分频版, 主动/被动模式

可切换RAL颜色可选 (Warnex结构漆)

Model: LA212

Drivers: 2 x 12" LF / 2 x 1.75" HF / 4 x 6.5" HF

Frequency range: 60 - 20000 Hz

Power capacity program / peak: 500 / 1000 W biamped LF

300 / 600 W biamped MF

120 / 300 W biamped HF

800 / 1200 W, passive

Impedance: 8 ohms biamped LF

8 ohms biamped MF

16 ohms biamped HF

8 ohms passive

Coverage range (h x v): 80° or 120° × 10°

Sensitivity 1 W / 1 m: 103 dB biamped LF

108 dB biamped mF

111 dB biamped HF

116 dB passive

SPLmax / 1 m / peak: 133 dB

Dimensions (h x w x d): 356 x 1120 x 688 mm

Weight: 36,9 kg / 38 kg with passive crossover

Finish: polyurethane coating

Options: LA10 internal passive crossover switchable

bet-ween active and passive mode, RAL colours

博天下之銳意  
展妙韻之升華



锐昇(博锐韵声)音响

广州锐昇(博锐韵声)音响设备有限公司

电话: 020-34560685

网址: <http://www.rise-audio.com>

地址: 广州市番禺区钟村镇新六亩路5号

颠覆娱乐行业的先行者!