




RH912

产品说明书


RH912 专业音响 PROFESSIONAL AUDIO



固定安装 Application and installation

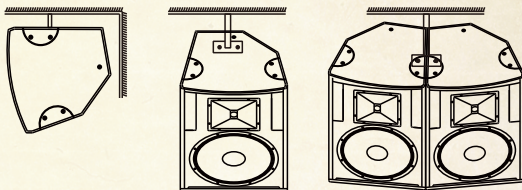

结构图纸 Construction Drawing:

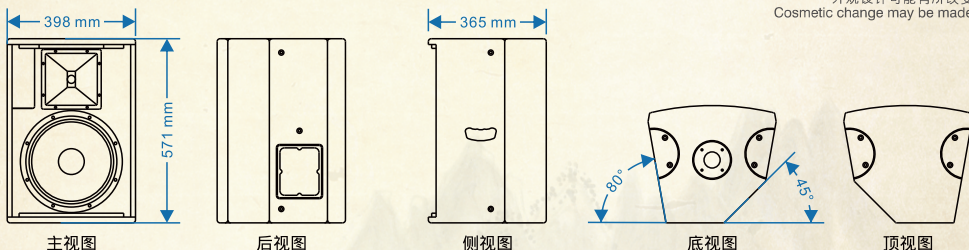

外观设计可能有所改变
Cosmetic change may be made

技术指标 Technical data & Introduction:

型号 Model		RH912
类型 TYPE		COMPACT, TWO-WAY PASSIVE 紧凑两分频全频
单元组成 Drivers		LF:1X12"(300mm)/3"(75mm)Voice-coil HF:1X1"(26mm)ex)t/1.75"(44mm)Voice-coil
频率响应 (+/-3dB) Frequency Response(+/-3dB)		50-18000Hz
覆盖角度 (-6dB) Dispersion(-6dB)		80x60(可旋转)
灵敏度 (1m/1W) Sensitivity(1m/1W)		101dB
输出声压级 maximum SPL		127.4dB continuous/133.4dB
额定阻抗 Nominal Impedance		8 Ohms
功率 Rated Power		400W AES / 1600W PEAK
推荐放大器功率 Recommended AMP		600W-800W@8 Ohms
分频点 Crossover Frequency		1800Hz
输入连接器 Connectors		2x Neutrik NI4MP
产品尺寸 (HxWxD) Dimensions (HxWxD)		571mm x 398mm x 365mm
包装尺寸 (HxWxD) Packing Dimensions (HxWxD)		585mm x 410mm x 375mm
净重量 Net Weight		28.kg
包装总重量 Gross Weight		32kg
箱体材料 Enclosure Material		优质高密度优质夹板
箱体网面 Enclosure Material		外圆特制网幕, 内圆形网钢
表面喷涂 Finish		黑色耐腐环保水性阻燃漆喷料 (可定制颜色)
吊装点 Hanging Position		15个 M8螺丝吊装孔位 及 4个铝合金吊装座
支撑座 Pole Mount		合金材质@35毫米标准底部支撑座
适用范围 Applications		音乐厅, 多功能厅, 礼堂, 会议室

博天下之銳意
展妙韻之升華



锐昇(博锐韵声)音响

广州锐昇(博锐韵声)音响设备有限公司

电话: 020-34560685

网址: <http://www.rise-audio.com>

地址: 广州市番禺区钟村镇新六亩路5号

颠覆娱乐行业的先行者!